

Exhaust Hose Reel 865

Spring recoiled



For all types of vehicle workshops, etc. where the hose can hang at a reachable height. The patented spring drive makes the reel very easy to handle. A patented integrated automatic damper saves energy and reduces the noise level. Optional retraction control is available for increased safety and efficiency. Mounting of fan on reel is possible. The spring recoiled hose reel can be upgraded to motor drive.

- Simple and safe installation
- Automatic damper for energy savings
- Simple adjustment of lifting capacity
- Automatic fan on/off switch as option
- Retraction control as option

Hose Ø, mm	Hose type*	Hose length, m, included	Max possible hose length, m**	Type of body	Automatic damper	Reinforced spring	Reel with hose Part no.	Reel without hose Part no.
75	NR-B	5.0	7.5	short	X		20800865	
75	NR-CP	5.0	7.5	short	X		20801465	
75	-	-	7.5	short	X			20800965
100	NR-B	5.0	7.5	short	X		20800665	
100	NR-CP	7,5	7.5	short	X		20801265	
100	NR-B	10,0	10,0	wide	X		20801865	
100	NR-CP	10,0	10,0	wide	X		20801965	
100	-	-	7.5	short				20804365
100	-	-	10,0	wide				20804665
100	-	-	7.5	short	X			20800765
100	-	-	10,0	wide	X			20800365
125	NR-B	5.0	5.0	short	X		20800465	
125	NR-CP	5.0	5.0	short	X		20801165	
125	NR-B	7.5	10,0	wide	X		20801765	
125	-	-	10,0	wide				20804765
125	-	-	10,0	wide	X			20800165
150	NR-B	5.0	5.0	short	X		20800265	
150	NR-CP	5.0	5.0	short	X		20801065	
150	NR-B	7.5	10,0	wide	X	X	20802565	
150	NR-CP	10,0	10,0	wide	X	X	20802365	
150	-	-	5.0	short				20804565
150	-	-	10,0	wide		X		20804865
150	-	-	5.0	short	X			20804165
150	-	-	10,0	wide	X	X		20804265
200	-	-	10,0	wide		x/double		20809065


* Hose type - see separate section

** Selection of additional hoses: see separate hose section

Product availability may differ by country

Exhaust Hose Reel 865

Electric motor driven

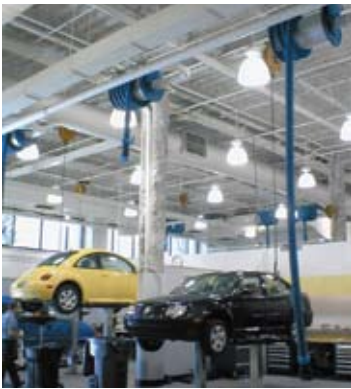

The best solution in workshops with a high ceiling, where overhead cranes etc. have to be considered, or where high vehicles must pass. Operated via a hand unit either an IR control or pendant control. A receiving eye on the reel shows the status of operation. Electronic limit switches reduce the risk of malfunction and unnecessary wearing of the hose. Fan start/stop is automatically controlled. Mounting of fan on reel is possible.

- Convenient and safe operation
- Automatic fan operation
- Settings for limit switches made from floor level
- Compact, modern design
- Quick & easy installation reduces cost

Power supply, V	100-240
Phase	1
Frequency, Hz	50/60
Max lifting capacity, kg	30

Hose Ø, mm	Hose type*	Hose length, m, included	Max possible hose length, m**	Type of body	For hand control	Limit switches	Reel with hose Part no.	Reel without hose Part no.
100	NR-CP	7.5	12.5	wide	IR or pendant	X	20802965	
100	NFC-3	7.5	12.5	wide	IR or pendant	X	20803065	
100	-	-	7.5	short	IR or pendant	X		20809465
100	-	-	12.5	wide	IR or pendant	X		20802665
125	NR-CP	7.5	10.0	wide	IR or pendant	X	20803365	
125	NFC-3	7.5	10.0	wide	IR or pendant	X	20803465	
125	-	-	10.0	wide	IR or pendant	X		20802765
150	NR-CP	10.0	10.0	wide	IR or pendant	X	20803965	
150	NFC-3	7.5	10.0	wide	IR or pendant	X	20803865	
150	-	-	10.0	wide	IR or pendant	X		20802865
200	-	-	10.0	wide	IR or pendant	X		20809165

* Hose type - see separate section

** Selection of additional hoses: see separate hose section

Product availability may differ by country

